



TU UPRIGHT COLUMN SKIP





The TU Centre Discharge Column Skip is designed to enable concrete to be poured into narrow shuttering or columns. The skips are fitted with a patented integral gate which ensures continuity of concrete flow and a 200mm diameter 3 metre long heavy duty discharge hose which prevents segregation.

Gate operation is by means of a nylon rope attached to a spring return lever ensuring excellent control whilst allowing the operator to control the pour from ground level.

Options available for the TU are a quick release mechanism which allows for easy changing of discharge hose diameter and length.

Also available are specifically designed gates for use with very fluid self compacting concretes.

Other sizes are available on request

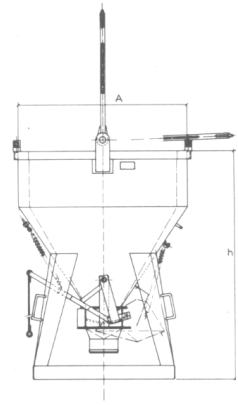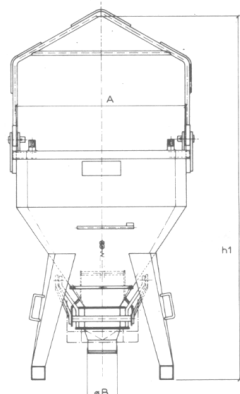

Capacity in litres	Dimensions in mm						Unladen weight (Kg)
	A	h	h1	Length	Width	Height	
500	1051	1337	2145	1180	1110	1467	242
800	1200	1500	2465	1320	1270	1630	325
1000	1200	1640	2605	1320	1270	1770	340
1250	1500	1650	2755	1640	1590	1800	475
1500	1500	1750	2835	1640	1590	1900	510
2000	1500	1950	3080	1640	1590	2100	580

WHITNEY ENGINEERING LIMITED

Unit 6, Ladford Trading Park, Seighford, Stafford, ST18 9QE
Tel: 01785 282811 Fax: 01785 282930
Email: sales@whitneyeng.co.uk Web: www.whitneyeng.co.uk