

UPRIGHT CONEFLOW SKIP

Side discharge

WHITNEY

SECATOL

Use: This is the concrete skip that is most used in construction and public works sites, as it makes possible to put the concrete in place precisely and rapidly. Its loading height is specially designed for easy loading.

Means of handling: 142 B – side lifting points
142 E – side lifting points + lifting chains

Interest: The conical shape of this skip allows a high precision in the concrete flowing and eases its cleaning.

Finish: Painted

Gate type: Large opening gate

Type of discharge: Offset

Gate operation: Lever or hand wheel



Model 142 E 500L VO


Model 142 E 500L



Model 142 B 500L VO



Model 142 B 500L

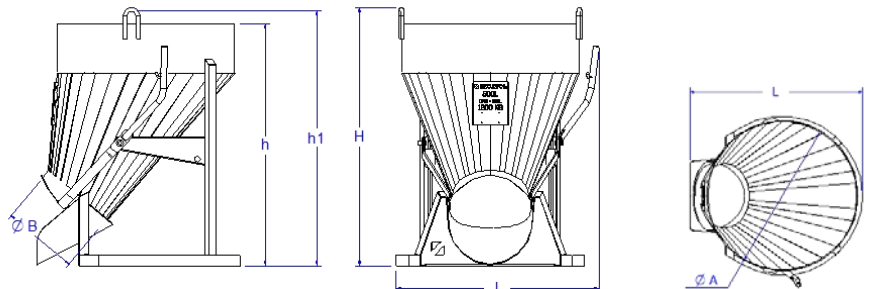

Product code	Designation	Capacity (in Litres)*	SWL (kg)	Ø A (mm)	Ø B (mm)	h (mm)	h1 (mm)	L x l x H (mm)	Net weight (kg)			
07016	142 B skip 150 L	150	360	816	420	816	876	886 x 962 x 915	54			
07016E	142 E skip 150 L						2077**		61			
07023	142 B skip 200 L	200	480			893	893	953	886 x 962 x 967	57		
07023E	142 E skip 200 L							2154**		64		
07033	142 B skip 300 L	300	720			1084	1084	1144	886 x 962 x 1158	64		
07033E	142 E skip 300 L							2345		71		
07036	142 B skip 350 L	350	840			974	420	1143	1226	1125 x 1127 x 1246	106	
07036E	142 E skip 350 L								2395**		113	
07036VO	142 B skip 350 L VO								1226	1125 x 1048 x 1246	129	
07036EVO	142 E skip 350 L VO								2395**		137	
07053	142 B skip 500 L	500	1200					1343	1343	1413	1125 x 1127 x 1433	130
07053E	142 E skip 500 L									2581**		137
07053VO	142 B skip 500 L VO			1413	1125 x 1048 x 1433					153		
07053EVO	142 E skip 500 L VO			2581**						161		
07076	142 B skip 750 L	750	1800	1000	420	1508	1578	1189 x 1234 x 1598	150			
07076E	142 E skip 750 L						2709**		157			
07076VO	142 B skip 750 L VO						1578	1189 x 1174 x 1598	174			
07076EVO	142 E skip 750 L VO						2709**		182			
07103	142 B skip 1000 L	1000	2400			1771	1771	1841	1189 x 1234 x 1861	172		
07103E	142 E skip 1000 L							2972**		179		
07103VO	142 B skip 1000 L VO							1841	1189 x 1174 x 1861	195		
07103EVO	142 E skip 1000 L VO							2972**		204		

** h1= Lifting point height for skip 142 E

*Geometric capacity, apply a coefficient depending on the nature of the concrete to calculate the useful capacity (other capacities on request)
These technical details are given for information purposes only. they can be changed without any notice.

WHITNEY

Ladybird House, Brockhill Yard, Hewell Lane, Redditch, B97 6QT
www.whitneyeng.com sales@whitneyeng.com 01785 282811
Sole UK dealers for SECATOL Equipment

142 B
142 E